


Project Fact Sheet

Wolf Lake Middle School (CR Intermediate)

1725 W Ponkan Rd
Apopka, FL 32712

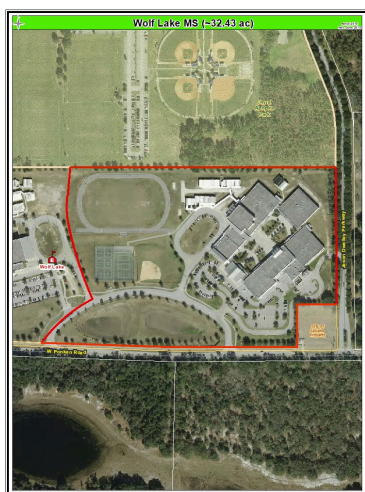

Project Information:

- **Project Start:** Sep 2021
- **Project Completion:** May 2022
- **Funding Source:** Sales Tax
- **District:** 7
- **Learning Community:** N
- **Architect/Engineer:** SGM Engineering, Inc
- **Contractor:** Wharton-Smith
- **Project Manager:** Krista McArthur
- **Project Budget:** \$3.1 M

Project Description:

Scope of work provides for HVAC system revisions in response to the disconnection of the Wolf Lake ES cooling load, and other HVAC system renovations to improve system reliability. Specific scope elements include chilled water piping reconfiguration and pump replacements; new variable frequency drives (VFD) for all pumps and air handling units (AHU); refurbishment of the cooling tower and replacement of the chemical treatment system; AHU valve replacement to facilitate the piping reconfiguration; a new Building Automation System (BAS); and test and balance of the revised chilled water system.

Project Update:

Project achieved substantial completion and awaits completion of the requirements needed for final acceptance.